


Description
FTS 20 / FTS 24, flächenbündige Innentüre, K-15144, K-15145
FTS 20 / FTS 24, flush interior doors, K-15144, K-15145

| | | | | | | | |
|--|-------------------------|-------|------------|----|------------|--------------------------------------|------------------|
| | Release No. -- | Level | Released | | Scale % | Modification 3 | Size 4 |
| | Mod. No. G34847 | Ver. | -- | Wi | | Drawing No. 0-45411-PN-0-0 | Sheet 1/4 |
| | Replacement for 9-38456 | Draft | 07.02.2018 | Se | | | |


Leistungs-erklärungen finden Sie auf der GU-Homepage
 "www.g-u.com/de/service/bauproduktenverordnung.html".
 Die Produktinformation Türschließer OTS/UTS/TS (Art.-Nr. 0-46884-P0-0-0)
 finden Sie auf der GU-Homepage "www.g-u.com/de/service/downloads.html".
 Proprietary rights apply in accordance with ISO 16016.

**Montageanleitung /
assembly instructions**
 V5


Declarations of Performance can be found at the GU-Homepage
 "www.g-u.com/en/services/construction-products-regulation.html".
 You will find the product information 0-46884-P0-0-0
 "OTS/UTS/TS -Door closer" at the GU-Homepage
 www.g-u.com under "SERVICES" in the menu item "Downloads".

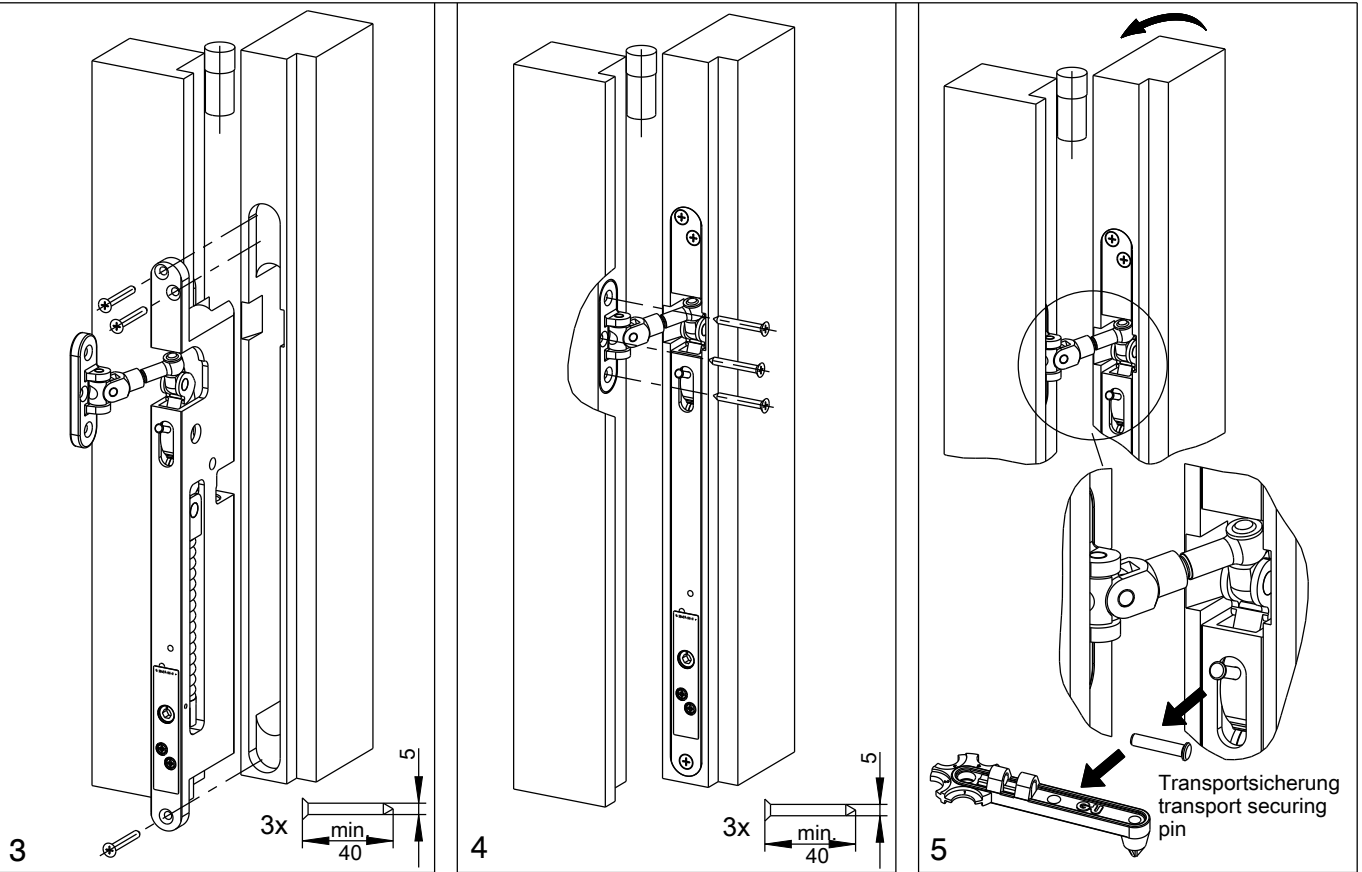

Proprietary rights apply in accordance with ISO 16016.

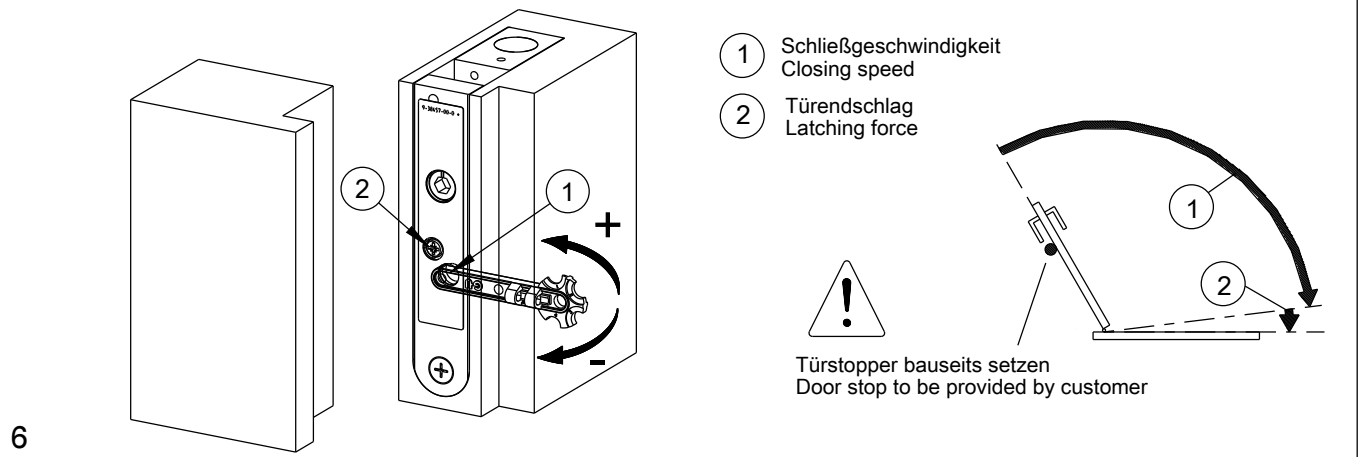

| |
|----|
| EN |
| - |
| - |
| - |
| - |

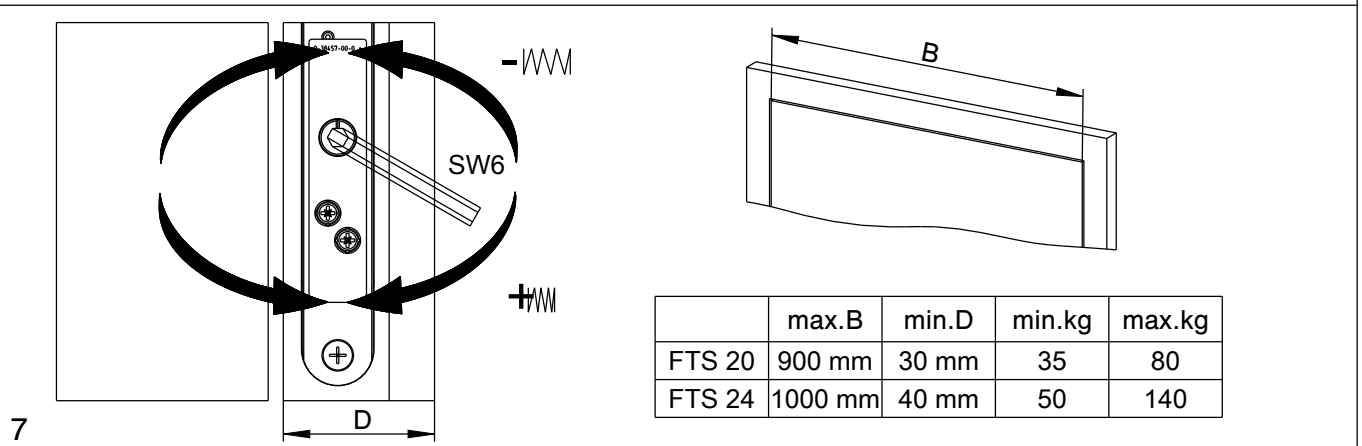


Description
FTS 20 / FTS 24, flächenbündige Innentüre, K-15144, K-15145


--
FTS 20 / FTS 24, flush interior doors, K-15144, K-15145

Montageanleitung /
assembly instructions
V5

| | | | | | | | |
|--|-------------------------|-------|----------|------------|------------|--------------------------------------|------------------|
| | Release No. -- | Level | Released | | Scale % | Modification 3 | Size 4 |
| | Mod. No. G34847 | Ver. | -- | Wi | | Drawing No. 0-45411-PN-0-0 | Sheet 2/4 |
| | Replacement for 9-38456 | | Draft | 07.02.2018 | | | Se |

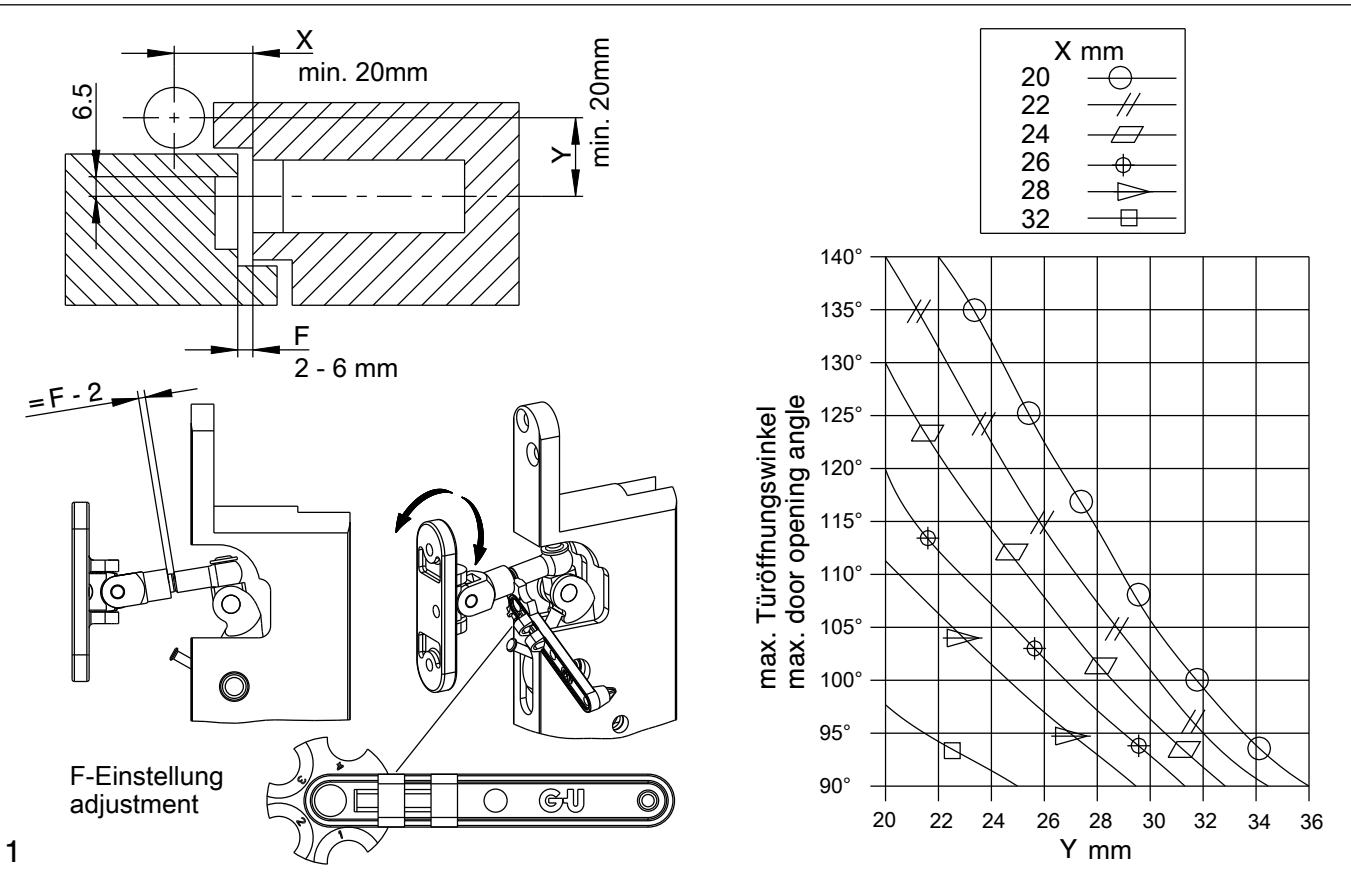


Proprietary rights apply in accordance with ISO 16016.

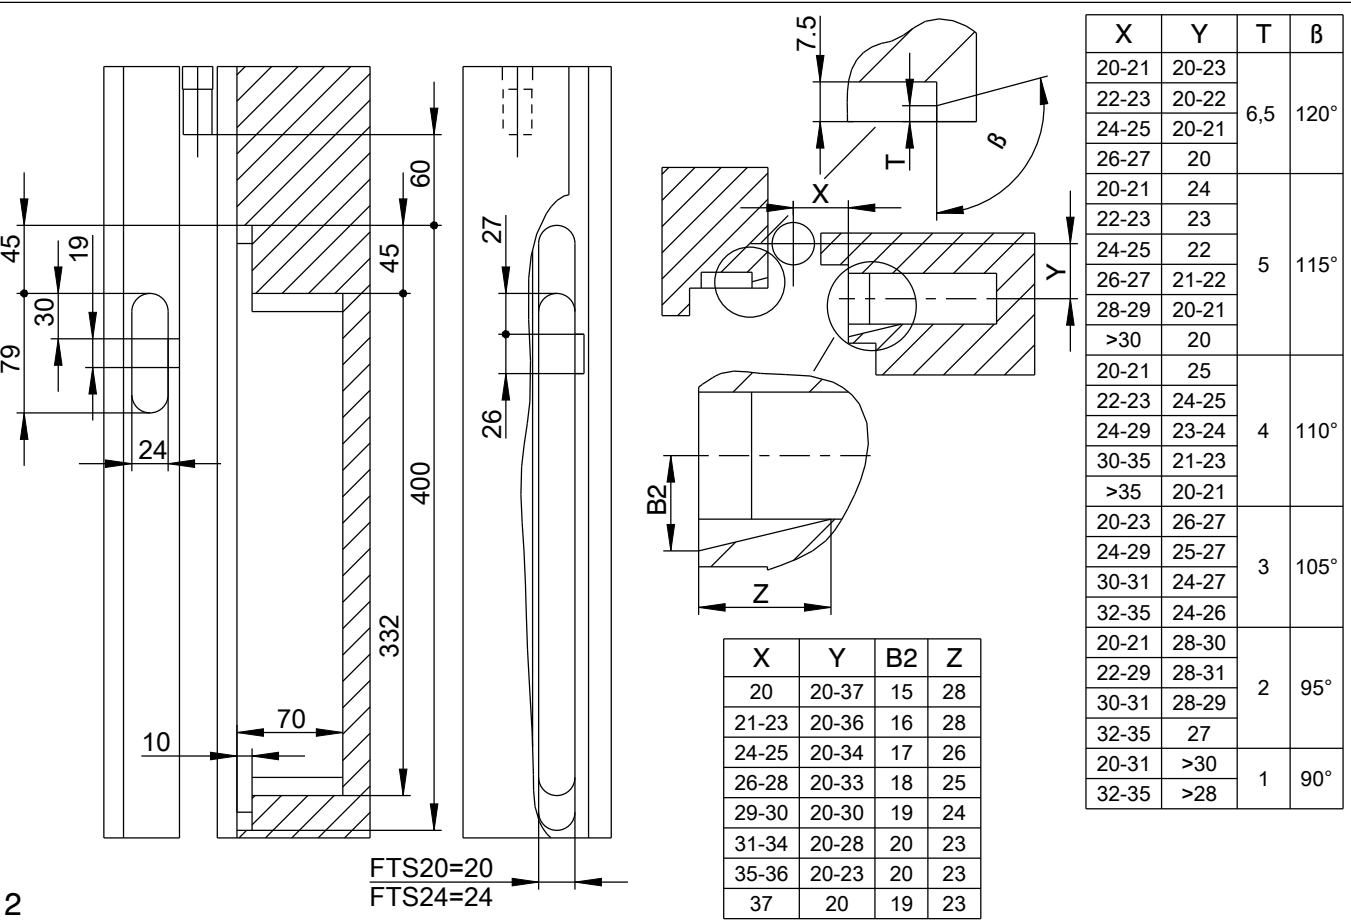


| |
|----|
| EN |
| - |
| - |
| - |
| - |

Montageanleitung /
assembly instructions
V5

| | | | | | | |
|---|--------------------|-------|------------|----|----------------|------|
| Description | | | | | | |
| FTS 20 / FTS 24, überfälzte Innentüre, K-15144, K-15145 | | | | | | |
| -- | | | | | | |
| FTS 20 / FST 24, rebated doors, K-15144, K-15145 | | | | | | |
| | Release No. | Level | Released | | Scale | |
| | -- | Ver. | -- | Wi | | % |
| | Mod. No. G34847 | Draft | 07.02.2018 | Se | | |
| Replacement for 9-38456 | | | | | Modification | Size |
| | | | | | 3 | 4 |
| | | | | | | |
| | | | | | 0-45411-PN-0-0 | 3/4 |

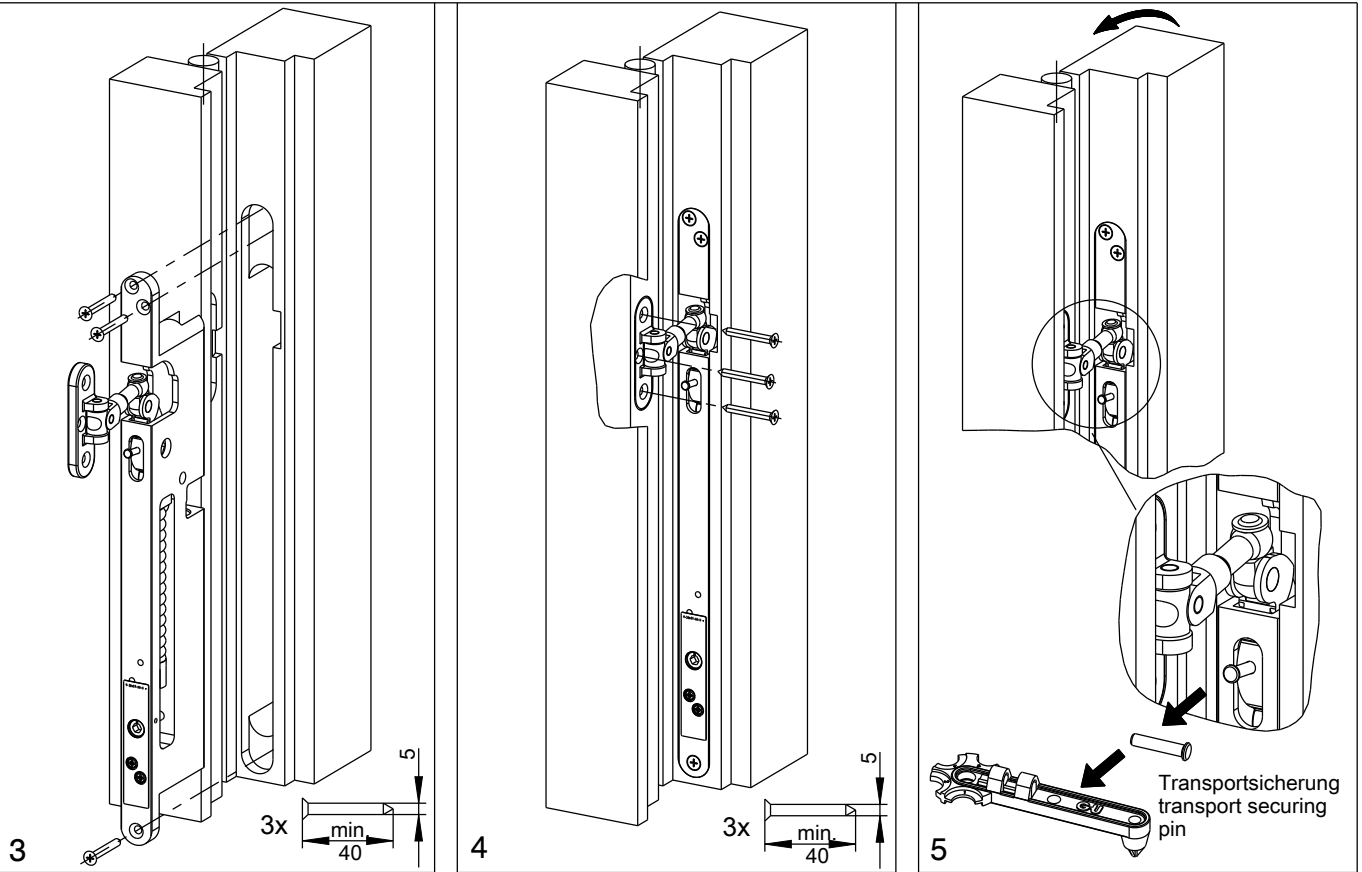


Proprietary rights apply in accordance with ISO 16016.

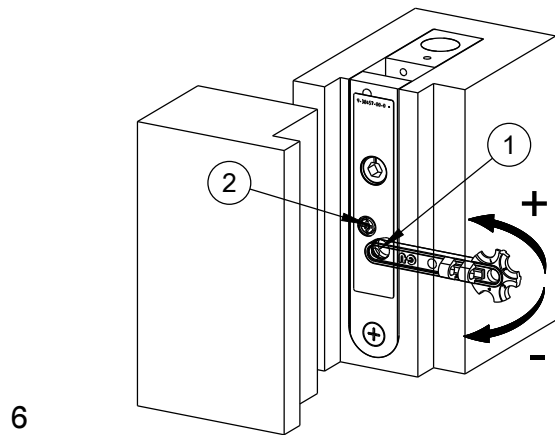

- ① Schließgeschwindigkeit
Closing speed
- ② Türendschlag
Latching force





Türstopper bauseits setzen
Door stop to be provided by customer

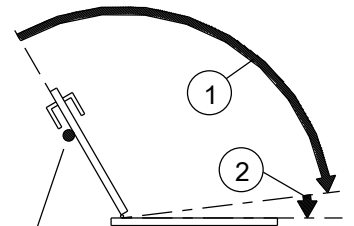

6

| |
|----|
| EN |
| - |
| - |
| - |
| - |

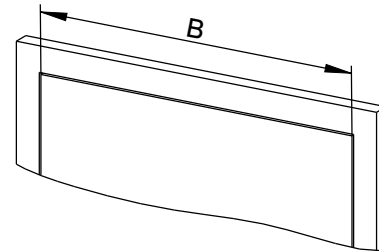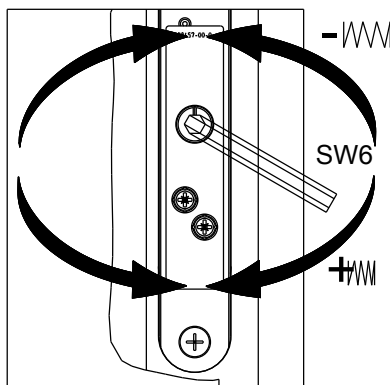

| | max.B | min.D | min.kg | max.kg |
|--------|---------|-------|--------|--------|
| FTS 20 | 900 mm | 30 mm | 35 | 80 |
| FTS 24 | 1000 mm | 40 mm | 50 | 140 |

7

Description

FTS 20 / FTS 24, überfälzte Innentüre, K-15144, K-15145
--
FTS 20 / FST 24, rebated doors, K-15144, K-15145

Montageanleitung /
assembly instructions
V5



Release No.
--
Mod. No.
G34847

| | | |
|-------|------------|----|
| Level | Released | |
| Ver. | -- | Wi |
| Draft | 07.02.2018 | Se |

Scale
%

Modification
3

Drawing No.

0-45411-PN-0-0

Size
4

Sheet

4/4

Replacement for 9-38456