


## Holzbauschrauben OK Line Speed - Technische Daten

mit Reibeteil und Reibspitze

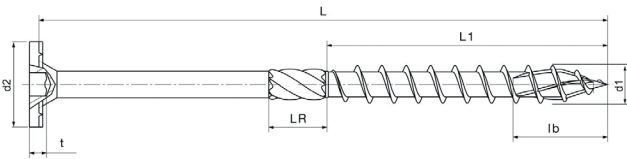

Art.-Nr.	Antrieb	Ø d1	Länge L	Gewindelänge L1	Kopf Ø d2	Kopfhöhe t	Länge Reibspitze lb	Länge Reibteil LR LZ
85.163.60120	TX 40	6.0 mm	120 mm	50 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.60140	TX 40	6.0 mm	140 mm	75 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.60160	TX 40	6.0 mm	160 mm	75 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.60180	TX 40	6.0 mm	180 mm	75 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.60200	TX 40	6.0 mm	200 mm	75 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.60220	TX 40	6.0 mm	220 mm	75 mm	16.1 mm	3.2 mm	19.8 mm	12 mm
85.163.8080	TX 40	8.0 mm	80 mm	50 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80100	TX 40	8.0 mm	100 mm	50 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80120	TX 40	8.0 mm	120 mm	80 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80140	TX 40	8.0 mm	140 mm	80 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80160	TX 40	8.0 mm	160 mm	80 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80180	TX 40	8.0 mm	180 mm	80 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80200	TX 40	8.0 mm	200 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80220	TX 40	8.0 mm	220 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80240	TX 40	8.0 mm	240 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80260	TX 40	8.0 mm	260 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80280	TX 40	8.0 mm	280 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80300	TX 40	8.0 mm	300 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80320	TX 40	8.0 mm	320 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80340	TX 40	8.0 mm	340 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80360	TX 40	8.0 mm	360 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80380	TX 40	8.0 mm	380 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm
85.163.80400	TX 40	8.0 mm	400 mm	100 mm	19.8 mm	3.9 mm	22.9 mm	12 mm